



TOP VIEW

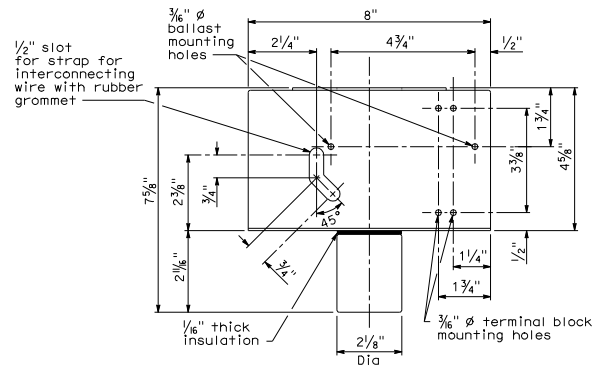


FRONT VIEW


MOUNTING BRACKET DETAILS

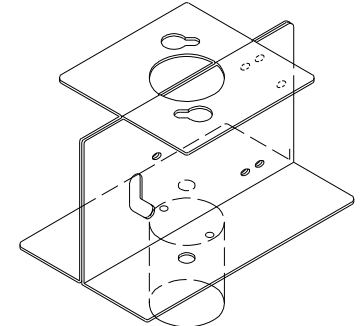

Preform two sheets 1/16" mild steel as shown, spotweld together in each corner with four spotwelds.



SIDE VIEW

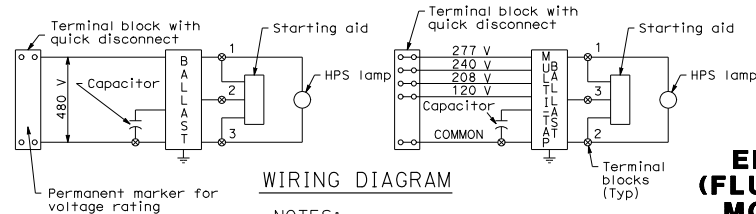

WIRING DIAGRAM

NOTES:

1. Fixture wiring shall be Type SFF-2.
2. Use No. 8 ϕ machine screws, lockwashers and nuts for mounting ballast and terminal strips.
3. In-line fuse as required on Standard Plan ES-13B.

STATE OF CALIFORNIA
DEPARTMENT OF TRANSPORTATION

ELECTRICAL SYSTEMS (FLUSH SOFFIT LUMINAIRE MODIFICATION DETAILS STRUCTURE INSTALLATIONS)

NO SCALE

ES-9F

DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET TOTAL NO. SHEETS

Jeffery G. McRae
REGISTERED ELECTRICAL ENGINEER
No. E14512
Exp. 6-30-06
ELECTRICAL
STATE OF CALIFORNIA

May 1, 2006
PLANS APPROVAL DATE

The State of California or its officers or agents shall not be responsible for the accuracy or completeness of electronic copies of this plan sheet.

To get to the Caltrans web site, go to <http://www.dot.ca.gov>